


BULK CURRENT INJECTION

The F-170501-1008-1 can inject very large RF currents into signal or power circuits up to 40 mm in diameter. The useable frequency range is from 10 MHz – 400 MHz.

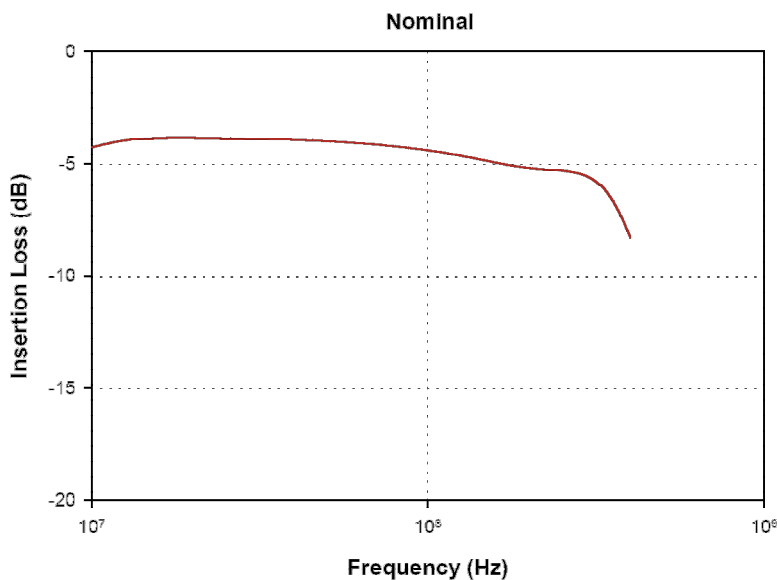

Specifications

Frequency: 10 MHz – 400 MHz
Inner Diameter: 40 mm
Outer Diameter: 127 mm
Height: 134 mm
Input Power rating: 2.5 kW (30 minutes)
Secondary Power Current Rating: DC - 400 Hz

- Differential Mode Single Conductor: 200 Amps
- Common Mode Total Cable Bundle: 500 Amps

Accessories

F-170421-1008-1 • Calibration Fixture
Bandwidth: 10 kHz – 400 MHz

Specifications subject to change without notice

FCC

Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.

F-170501-1008-1