

The PCH60 Series current transformer is compact, smaller than other models with the current ratio of the transformer is small, clamshell-style terminal cover is well protected by the second terminal. With related accessories you can use Din rail mounting



Electrical Specifications

MODEL	INPUT CURRENT	AVAILABLE OUTPUT
PCH60-300	300A	CURRENT OUTPUTS @ 5mA, 10mA, 15mA, 20mA, 50mA, 100mA, 1A, 5A Voltage OUTPUTS @0.333V, 0.5V, 1V, 2V, 5V
PCH60-500	500A	
PCH60-800	800A	
PCH60-1000	1000A	
PCH60-1200	1200A	



APPLICATIONS

- Energy and sub-metering products
- Electrical load monitoring
- Network equipment
- Instruments and sensors
- Control systems
- Go GREEN initiatives


FEATURES

- 0.452"x1.67" window opening (ID)
- Custom design Turns-Ratio available
- Rigid housing case with UL 94V-0 durable plastic
- M4 terminal output
- Approximate weight 650g


SPECIFICATIONS

- Standard Input Current 0.5-1200A
- Frequency 50Hz — 400Hz
- Standard accuracy 0.1, 0.2, 0.5
- Insulation Voltage 4000 Vac/1min
- Operating Temp. -40°C to +85°C
- Storage Temp. -45°C to +90 °C
- ANSI C57.13 and IEC60044-1 Standards

Mechanical Dimensions in mm

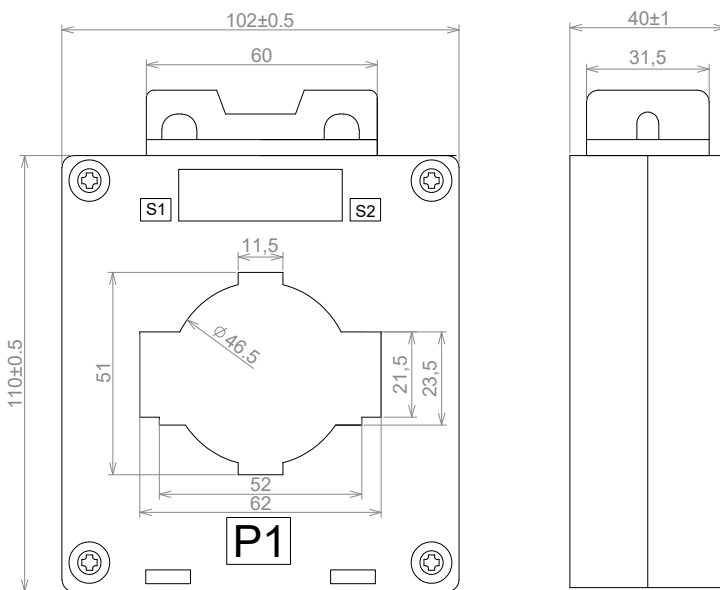

Mechanical Dimensions in mm

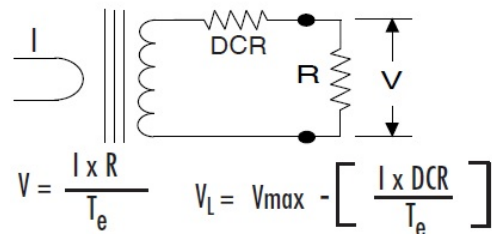

CAUTION

Before installation, safety precautions must be followed by licensed professional. Never energize primary unless short circuited terminals or burden connected to secondary.