


The PCU05 series are mini-precision current transformers. The CT is Small size, PCB mounting and low cost




Electrical Specifications

MODEL	INPUT CURRENT	AVAILABLE OUTPUT
PCU05-05	5 A	CURRENT OUTPUTS @ 5mA, 10mA, 15mA, 20mA
PCU05-10	10 A	
PCU05-15	15 A	
PCU05-20	20 A	


Mechanical Dimensions in mm



Front view

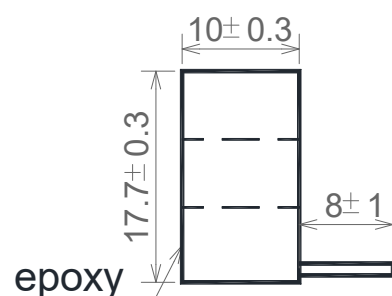

Left view



Bottom view

APPLICATIONS

- Energy and sub-metering products
- Electrical load monitoring
- Network equipment
- Instruments and sensors
- Control systems
- Go GREEN initiatives


FEATURES

- 0.197" window opening (ID)
- Custom design Turns-Ratio available
- Rigid housing case with UL 94V-0 durable plastic
- PCB Mount
- Approximate weight 10g

SPECIFICATIONS

- Standard Input Current 0.01-20A
- Frequency 50Hz — 400Hz
- Standard accuracy 0.1,0.2,0.5
- Insulation Voltage 4000 Vac/1min
- Operating Temp. -40°C to +85°C
- Storage Temp. -45°C to +90 °C
- ANSI C57.13 and IEC60044-1 Standards

Connection Diagram

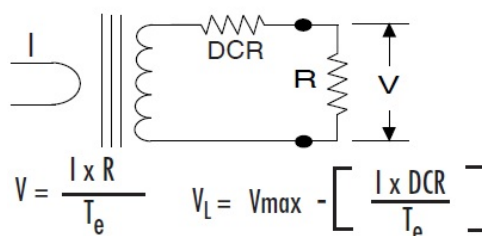

CAUTION

Before installation, safety precautions must be followed by licensed professional. Never energize primary unless short circuited terminals or burden connected to secondary.