


BULK CURRENT INJECTION

The F-080409-1008-1 has been designed to extend the use of conducted immunity testing over the bandwidth of 2.0 GHz – 3.0 GHz. It combines high efficiency, high power rating, and compact size, supporting testing of individual cable harnesses during benchtop testing as well as cable harnesses inside vehicles.

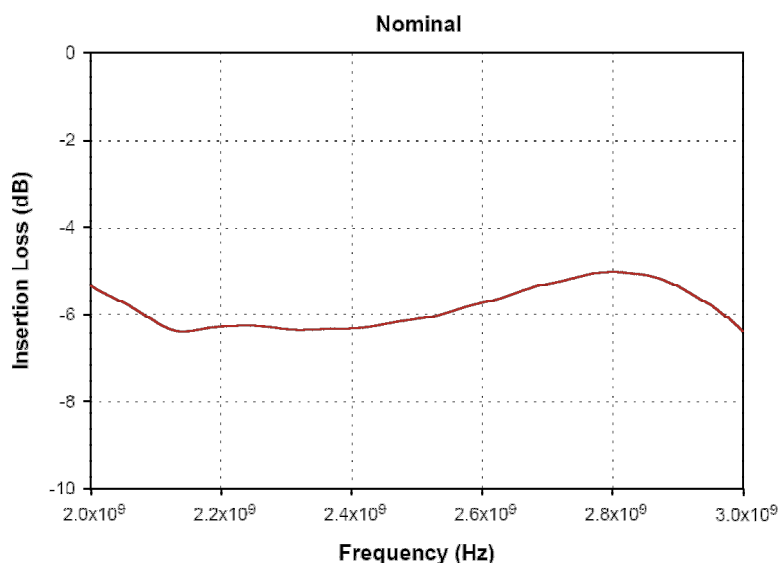

Specifications

Frequency: 2.0 GHz – 3.0 GHz
Inner Diameter: 32 mm
Outer Diameter: 71 mm
Height: 19 mm
Input Power rating: 250 watts (30 min)
Secondary Power Current Rating: DC - 400 Hz

- Differential Mode Single Conductor: 400 Amps
- Common Mode Total Cable Bundle: 1000 Amps

Accessories

F-080409-1008-2 • Calibration Fixture
Bandwidth: 2.0 GHz – 3.0 GHz

Specifications subject to change without notice



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.

F-080409-1008-1