


# BULK CURRENT INJECTION

The F-120-8F has been designed to extend the use of conducted immunity testing over the bandwidth of 10 kHz – 400 MHz.



# F-120-8F

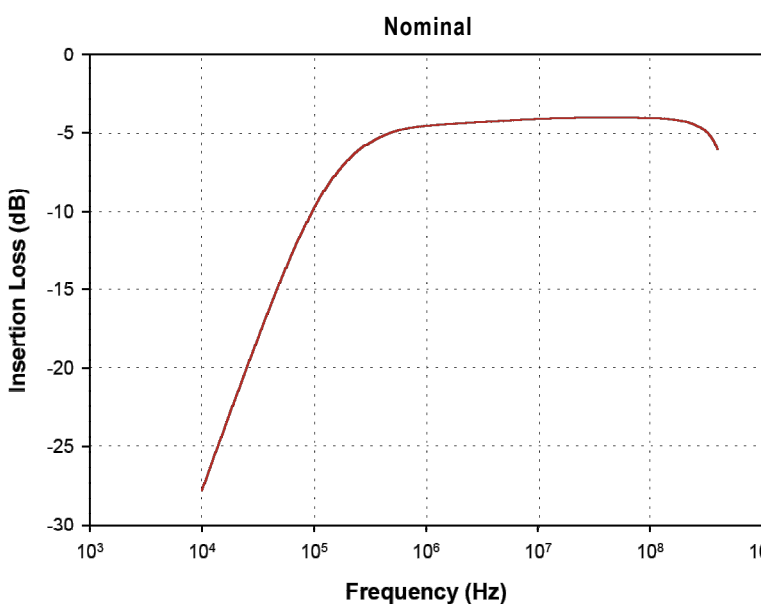

## Specifications

|                 |                  |
|-----------------|------------------|
| Frequency:      | 10 kHz – 400 MHz |
| Inner Diameter: | 40 mm            |
| Outer Diameter: | 127 mm           |
| Height:         | 134 mm           |

Continuous Use Rating: Can be used at the 300 mA level for 8 hours or 600 mA for 4 hours without over-heating.

Secondary Power Current Rating: DC - 400 Hz

- Differential Mode - Single Conductor: 100 Amps
- Common Mode - Total Cable Bundle: 500 Amps

## Accessories

Calibration Fixture

- FCC-BCICF-4 (ISO 11452-4)
- F-170421-1008-1 (DO-160, Mil Std 461)

*Specifications subject to change without notice*

# FCC

Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502  
Phone: 310-303-3300  
Email: [sales@fischercc.com](mailto:sales@fischercc.com)

© Fischer Custom Communications, Inc.