


BULK CURRENT INJECTION

The F-120-9A has been designed to extend conducted immunity testing over the bandwidth of 10 kHz – 230 MHz specifically for the Common Mode bulk current injection specified in IEC 61000-4-6 Edition 4.0.



F-120-9A

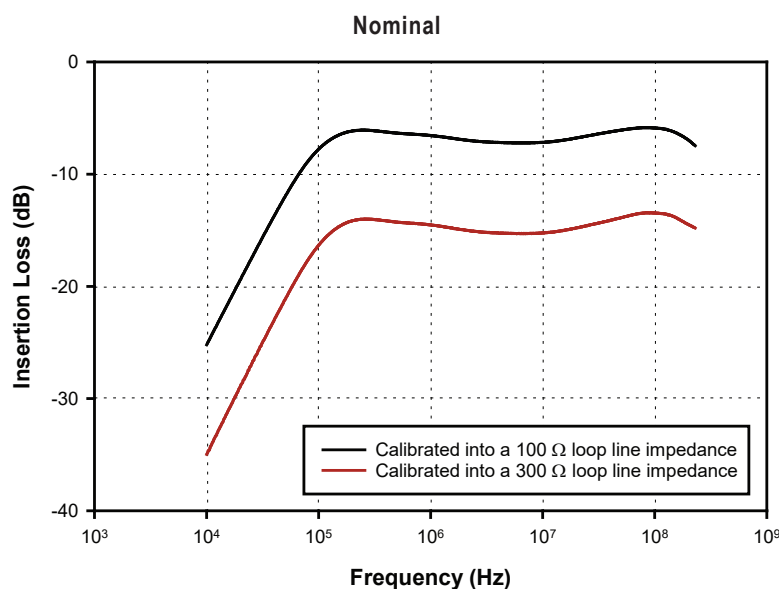

Specifications

Frequency: 10 kHz – 230 MHz
Inner diameter: 40 mm
Outer diameter: 127 mm
Height: 134 mm
Input Power rating: 100 watts (30 min)
DC – 400 Hz:
Differential Mode Single Conductor: Not Applicable
Common Mode Total Cable Bundle: 500 Amps

Accessories

FCC-BCICF-6-150 • Calibration Fixture
Bandwidth: 150 kHz – 230 MHz

Specifications subject to change without notice



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.