


BULK CURRENT INJECTION

The F-161012-1008-1 is a high efficiency Injection Probe used primarily for low frequency conducted susceptibility testing.

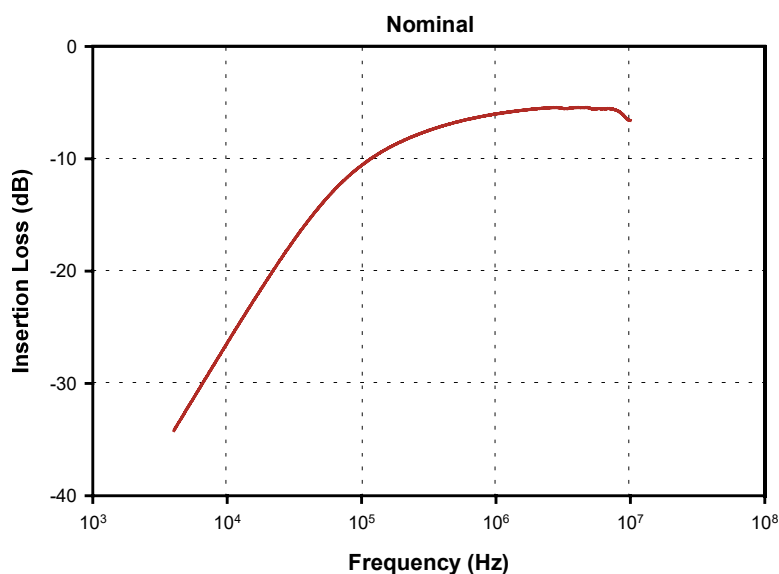

Specifications

Frequency: 4 kHz – 10 MHz
Coupling Window: 54 mm x 102 mm
Weight: 55 kg
External Diameter:
Width: 203 mm
Height: 241 mm
Length: 305 mm
Input Power rating: 2.5 kW (30 min)
Secondary Power Current Rating: DC - 400 Hz

- Differential Mode Single Conductor: 300 Amps
- Common Mode Total Cable Bundle: 1000 Amps

Accessories

F-161012-1008-2 • Calibration Fixture
Bandwidth: 4 kHz – 10 MHz

Specifications subject to change without notice



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.

F-161012-1008-1