
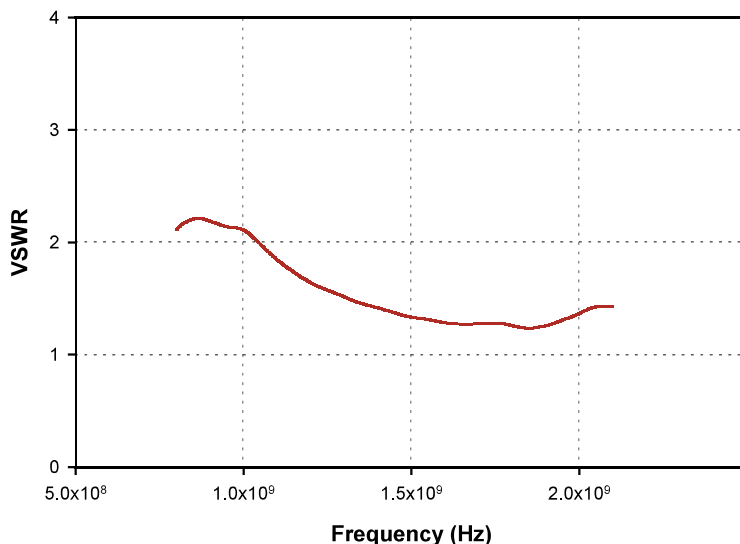


CALIBRATION FIXTURE

Injection Probe Calibration Fixtures are a part of the test equipment required by most of the Bulk Current Injection test procedure specifications. The FCC-BCICF-150-2 calibration fixture allows the user to quickly and easily calibrate the injection probe prior to performing compliance testing.

This calibration fixture offers two important benefits.

1. Due to variable circuit impedances or resonances in cables and cable looms, the calibration fixture is used to establish the forward power into the injection probe needed to develop the specified currents in the system under test.
2. The fixture can be used to measure the injection probes insertion loss.

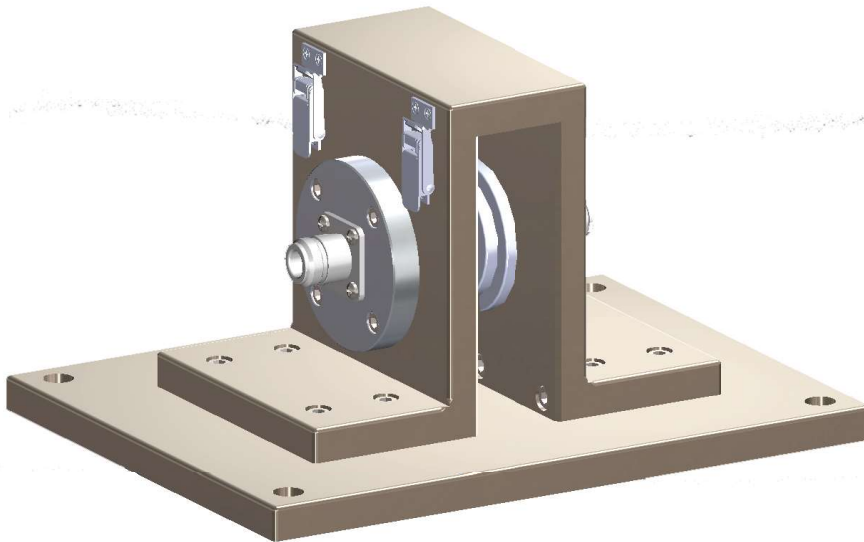

Specifications

Frequency:	800 MHz – 2.1 GHz
VSWR:	See Chart
Dimensions:	(L x W x H) 216 mm x 178 mm x 145 mm
Weight:	2.3 kg

FCC-BCICF-150-2

FCC

Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.