


CURRENT PROBE

The F-2000-32mm-2 is for laboratory and field testing. This probe has a small outer diameter, approximately 71mm, with an internal diameter of 32mm. It can operate up to 350 amperes of DC – 400 Hz, 3 amperes of CW and 100 amperes of peak pulse current.

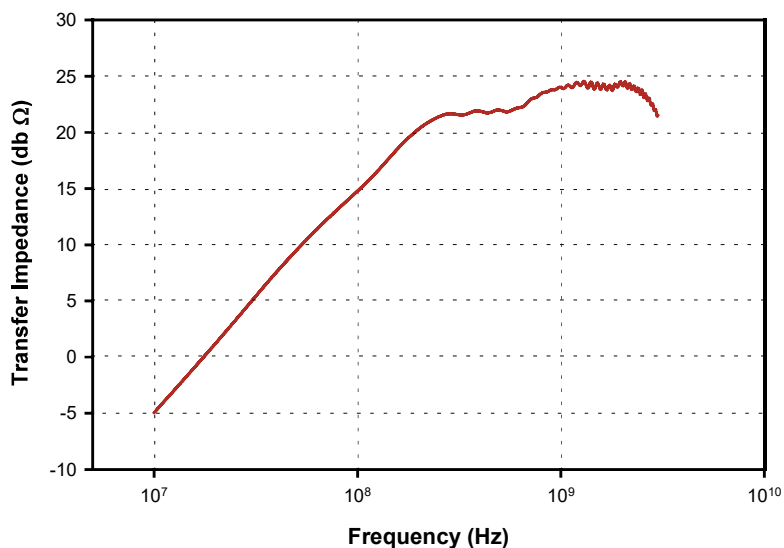

Specifications

Frequency:	10 MHz - 3.0 GHz
Internal diameter:	32 mm
External diameter:	71 mm
Height:	19 mm
ZtΩ ¹ :	18
dBΩ ¹ :	25
Connector:	Type-N
DC to 400 MHz:	350 amperes
RF(CW):	3 amperes
Peak Pulse Current ² :	510 amperes

Calibration Fixture

FCC-MPCF-4-32-40/71/19
Bandwidth: 10 MHz – 3 GHz

1: Probe calibrated with 50 Ω + j0Ω Load Impedance.
2: Depends upon the pulse width and pulse rep. rate.



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.

F-2000-32mm-2