
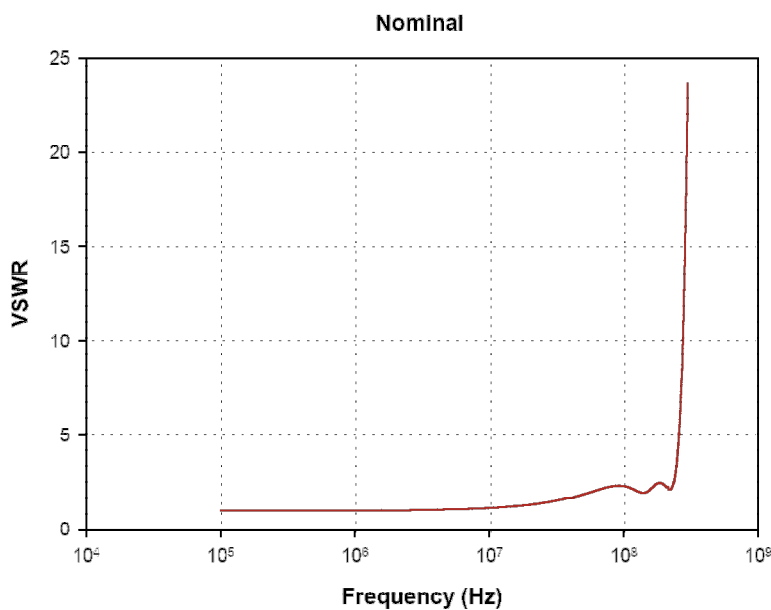


CALIBRATION FIXTURE

The FCC-MPCF-2-305/394/51 Calibration Fixture is used to calibrate current probes. Four latches secure the top cover to the top half of the fixture. When the top cover of the fixture is removed, the current probe can easily be clamped around the center conductor.

The FCC-MPCF-2-305/394/51 accommodates Fischer Custom Communications Current Probes with a 305 mm internal diameter, 394 mm outer diameter, and a 51 mm height.

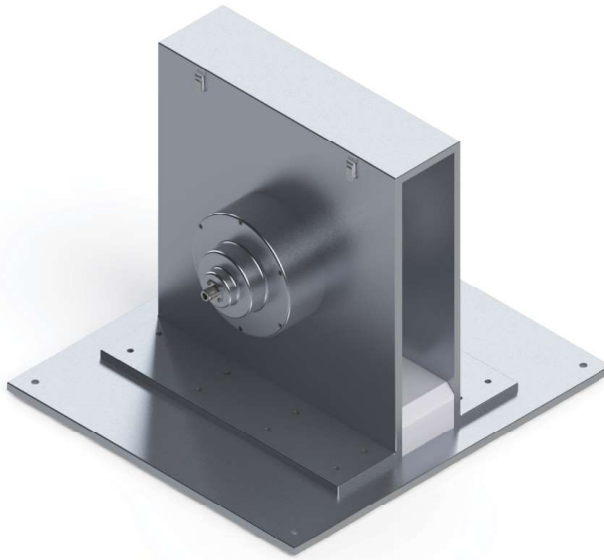

Specifications

Frequency:	10 kHz - 300 MHz
VSWR:	< 25 : 1
Length:	508 mm
Width:	559 mm
Height:	458 mm
Weight:	40 kg

Current Probes

F-170317-1005-1

Specifications subject to change without notice

FCC

Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.

FCC-MPCF-2-305/394/51