
CALIBRATION FIXTURE

The FCC-MPCF-F-2000-40mm Calibration Fixture is used to calibrate current probes. Four latches secure the top cover to the top half of the fixture. When the top cover of the fixture is removed, the current probe can easily be clamped around the center conductor.

The FCC-MPCF-F-2000-40mm accommodates Fischer Custom Communications Current Probes with a 40 mm internal diameter, 80 mm outer diameter, and a 19 mm height.

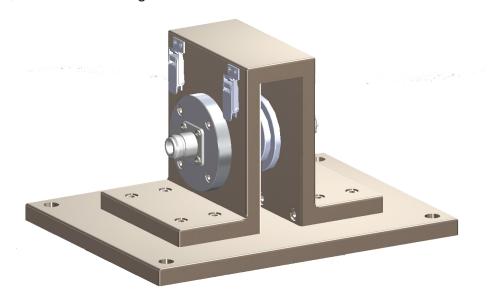

Nominal 4 3 2 106 107 108 109 101 Frequency (Hz)

Specifications

 Frequency:
 10 MHz - 2.1 GHz

 Length:
 250 mm

 Width:
 177 mm

 Height:
 162 mm

 Weight:
 3.1 kg

Current Probes

F-2000-40mm-1

Specifications subject to change without notice



19220 Normandie Ave., Unit B Torrance, CA 90502

Phone: 310-303-3300 Email: sales@fischercc.com