
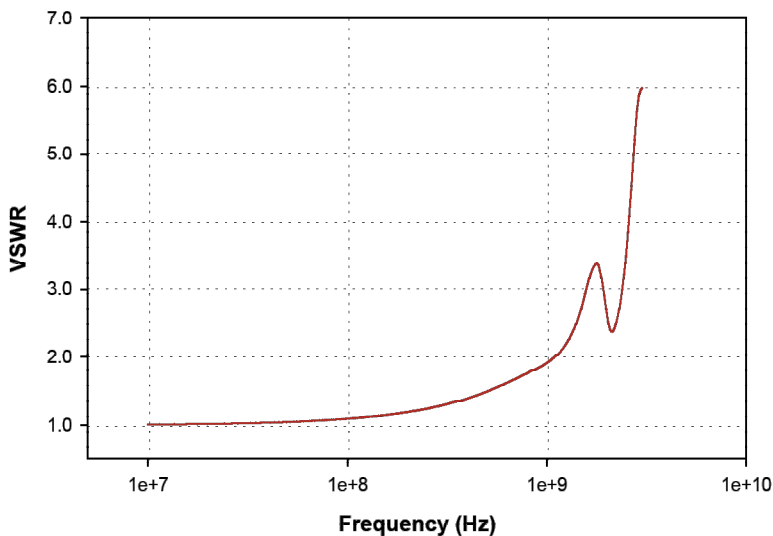


CALIBRATION FIXTURE

The FCC-MPCF-4-32-40/71/19 Calibration Fixture is used to calibrate current probes. Four latches secure the top cover to the top half of the fixture. When the top cover of the fixture is removed, the current probe can easily be clamped around the center conductor. The FCC-MPCF-4-32-40/71/19 accommodates Fischer Custom Communications Current Probes with a 40 mm internal diameter or a 32 mm internal diameter.

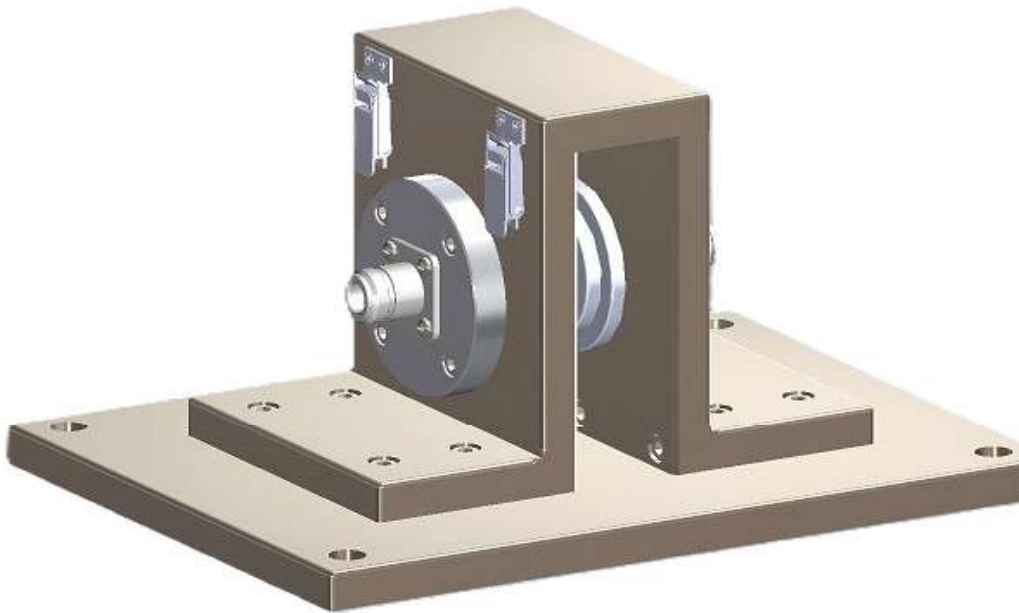

Specifications

Frequency:	10 MHz - 3.0 GHz
Internal diameter:	250 mm
External diameter:	177 mm
Height:	162 mm
Weight:	3.1 kg

Compatible Current Probes

F-2000-32mm-1
F-2000-32mm-2
F-2000-40mm-1

F-MPCF-4-32-40/71/19

FCC

Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.