
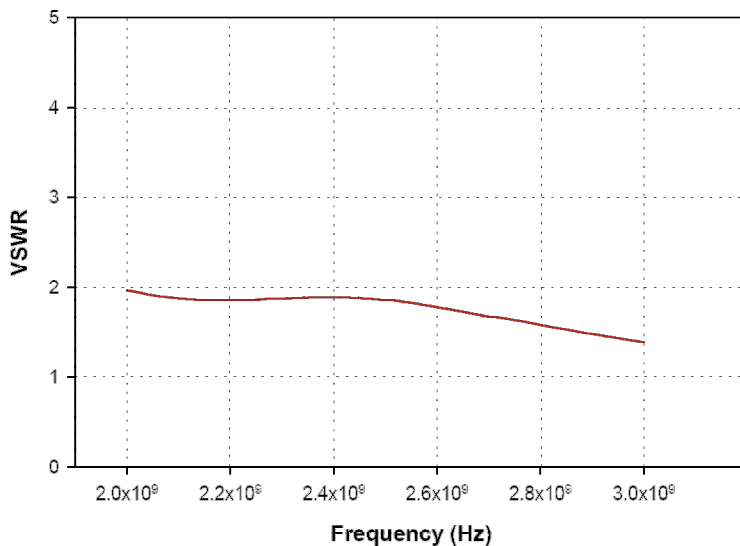


# CALIBRATION FIXTURE

Injection Probe Calibration Fixtures are a part of the test equipment required by most of the Bulk Current Injection test procedure specifications. The F-080409-1008-2 calibration fixture allows the user to quickly and easily calibrate the injection probe prior to performing compliance testing.

This calibration fixture offers two important benefits.

1. Due to variable circuit impedances or resonances in cables and cable looms, the calibration fixture is used to establish the forward power into the injection probe needed to develop the specified currents in the system under test.
2. The fixture can be used to measure the injection probes insertion loss.

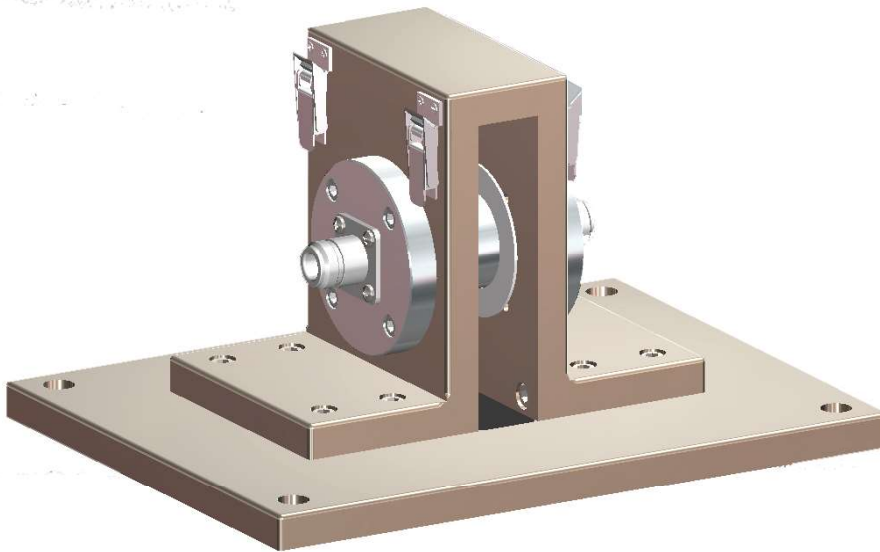

## Specifications

Frequency: 2 GHz – 3 GHz  
Weight: 2.1 kg  
Dimensions: (L x W x H) 226 mm x 173 mm x 127 mm

# F-080409-1008-2

# FCC

Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503  
Phone: 310-303-3300  
Fax: 310-371-6268  
Email: [sales@fischercc.com](mailto:sales@fischercc.com)

© Fischer Custom Communications, Inc.