
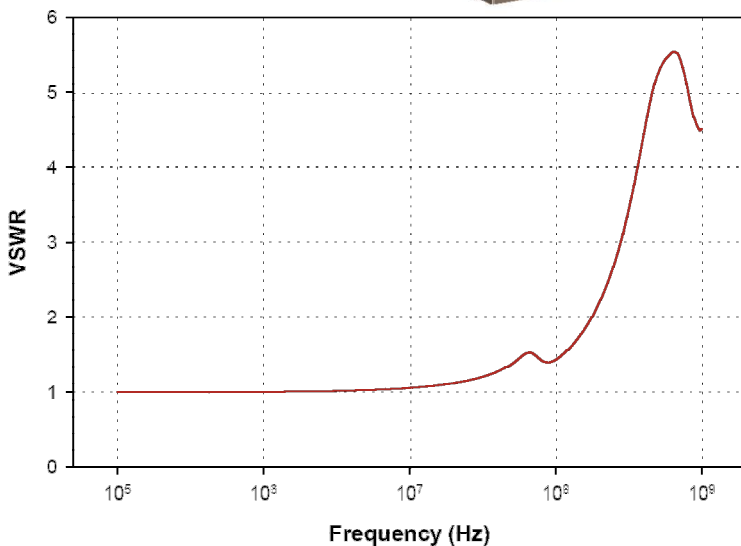


CALIBRATION FIXTURE

Injection Probe Calibration Fixtures are a part of the test equipment required by most of the Bulk Current Injection test procedure specifications. The FCC-BCICF-2 calibration fixture allows the user to quickly and easily calibrate the injection probe prior to performing compliance testing.

This calibration fixture offers two important benefits.

1. Due to variable circuit impedances or resonances in cables and cable looms, the calibration fixture is used to establish the forward power into the injection probe needed to develop the specified currents in the system under test.
2. The fixture can be used to measure the injection probes insertion loss.

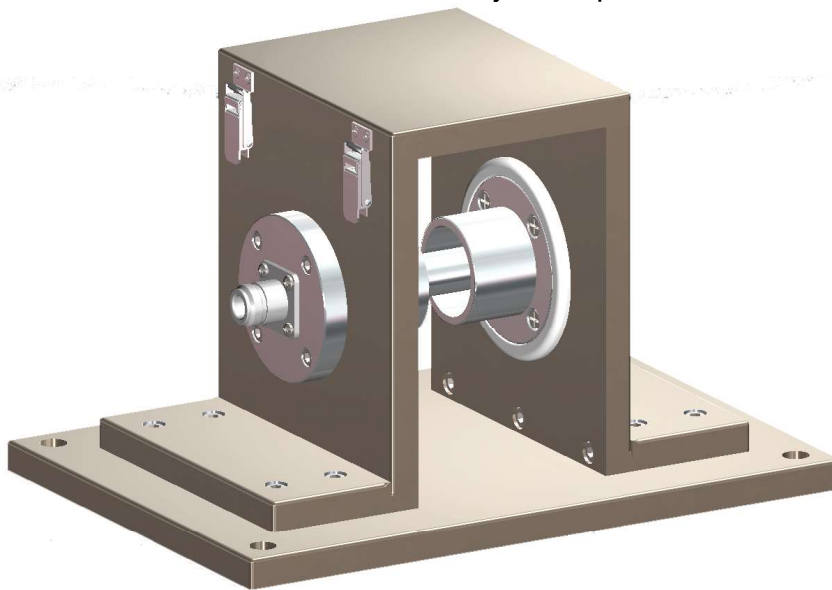

Specifications

Frequency:	100 kHz –1 GHz
VSWR:	See Chart
Dimensions:	(L x W x H) 254 mm x 178 mm x 160 mm
Weight:	2.6 kg



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300

Email: sales@fischercc.com

© Fischer Custom Communications, Inc.

FCC-BCICF-2